

VIBRATORS



VIBRATORS WITH ROLLERS


MOLOSSO	H2
MASTINO	H3
TERRANOVA	H4

VIBRATORS WITH PLATE

E-FOX	H5
LUPETTO.....	H6



More than 40 years ago, the company's founder, Mirco Raimondi, prototyped the first tile-beater ("Lupetto") which became the first Raimondi product. From then on, Raimondi's tile-beaters are recognized as benchmark due to their effectiveness and reliability. The 4 models still in the catalog are produced for the tiles installation with the traditional "mud-bed" method, to which we added "e-FOX" tiles vibrator, specifically designed to ensure a full bound when large format tiles are laid with adhesive.







MOLOSSO

VIBRATORS

TECHNICAL CHARACTERISTICS



- Designed for laying tiles 60x60 cm (23 5/8" x 23 5/8") of 20 mm (3/4") thickness in mud bed, using the vibration method.
- Sturdy structure and 0,9 HP - 0,66 kW motor; net weight: 85 Kg (187 lbs).
- Five vibration intensities.
- Equipped with 36 rollers (9 rows of 4 rollers each) Ø 55 mm (2").
- Telescopic handle.
- The high vibration frequency enables perfect levelling of the tiles and ensures the full bond of the mud to the tile.
- Steel roller holder.

MODEL SPECIFICATIONS

Part No.				
350R9 UE	8024648093820	230 V 50/60 Hz	Single-phase	0,9 HP / 0,66 kW
350R9 US	8024648094094	110 V 60 Hz		0,9 HP / 0,66 kW
350R9 GB	8024648096029	110 V 50 Hz		0,9 HP / 0,66 kW
				2800 / 3360
				3360
				2800

DIMENSIONS AND WEIGHT


Part No.							
MOLOSSO	1	85 Kg	187.4 lbs	90x72x h 63 cm	35 1/2"x28 1/3"x h 25"	99 Kg	218.26 lbs





MASTINO

TECHNICAL CHARACTERISTICS



PACKAGE



- For laying tiles in mud bed, using the vibration method.
- The high vibration frequency (10000 rounds/min.) enables perfect levelling of the tiles and ensures the full bond of the mud to the tile.
- Three vibration speeds: 5000/7000/10000 rounds/min;
- Telescopic handle.

- With 36 rollers (9 rows of 4 rollers each) Ø 40 mm (1 5/8").
- Steel roller holder.
- Supplied with: transformer from 230/110 Volt to 42 Volt.

MODEL SPECIFICATIONS

Part No.							
349	8024648004314	230/42 V 50/60 Hz	Single-phase	250 W	10000/12000	49x56 cm 19 1/4"x22"	•
349 US	8024648089670	110/42 V 60 Hz					•
349 GB	8024648009425	110/42 V 50 Hz					•

DIMENSIONS AND WEIGHT

Part No.							
MASTINO	1	56,6 Kg	124.8 lbs	60x60xh 34 cm + 100x50xh 12 cm	23"x23"xh 13 1/2" + 40"x20"xh 5"	59 Kg	130.1 lbs





TERRANOVA

TECHNICAL CHARACTERISTICS



300 W



47x52 cm



44 ROLLERS



SPEED SELECTOR



TELESCOPIC HANDLE

PACKAGE



CARTON BOX

- For laying tiles in mud bed, using the vibration method.
- The high vibration frequency (10000 rounds/min.) enables perfect levelling of the tiles and ensures the full bond of the mud to the tile.
- Three vibration speeds: 4000/6500/8600 rounds/min.
- With 44 rollers (11 rows of 4 rollers each) Ø 40 mm (1 5/8");

- Steel roller holder.
- Supplied with: transformer from 230/110 Volt to 42 Volt.

VIBRATORS

MODEL SPECIFICATIONS

Part No.							
105	8024648004321	230/42 V 50/60 Hz	Single-phase	200 W	8600/10300	47x52 cm 18 1/2"x20 1/2"	•
105USA	8024648009456	110/42 V 50/60 Hz					•

DIMENSIONS AND WEIGHT

Part No.							
TERRANOVA	1	47 Kg	103.6 lbs	80x50xh 30 cm	31 1/2"x20"xh 11 7/8"	49 Kg	108 lbs





2-in-1 products.

Supplied with bag.



PACKAGE



CARTON BOX

- Professional cordless vibrator designed to vibrate large format tiles in order to expel the air from underneath the slab (avoiding air pockets), so to obtain the perfect adhesive coverage;
- Extremely effective also for the perfect bonding of uncoupling and waterproofing membrane sheaths;
- Battery powered: no more cords getting in the way;
- The battery provides abundant autonomy: within 150 and 200 m² (1,600 - 2,100 sq. ft.) vibrated surface on a single charge. The battery has a very long life: more than 100.000 m² (1 million sq. ft.) before the performance (of the battery) starts to decrease;
- 21x41 cm (8 1/4" x 16 1/8") vibrating area, ideal for vibrating large format slabs with maximum speed and effectiveness. The vibrating area can be quickly reduced to 15x15 cm (6"x6") to vibrate smaller surfaces and / or small tiles like steps, planks, columns;
- Ideal to be used both on wall and floor thanks to its extremely low weight: 5,8 Kg (12.8 lbs)

- with 24x41 cm (8 1/4" x 16 1/8") vibrating plate; 3,1 Kg (6.8 lbs) with 15x15 cm (6"x6") vibrating plate;
- PVC vibrating area (plates) provide low friction onto slab surface, ensuring a low user fatigue and, thanks to its rigidity, they transfer to the slab/sheaths the entire vibrating force;
- The high frequency vibrations guarantee maximum efficiency by minimizing mechanical stress to the tile/slab, even in critical situations (for instance a low thickness slab with large cut-openings, C shaped cutouts or multiple round holes);
- 3 handles: two externals for two-hands use and one central for one-hand use;
- High vibration frequency (motor Rpm: 3.500);
- Motor: 15V direct current, battery power 38.5 Wh;
- Supplied with a protective padded bag (provided with both handles and shoulder belt) ideal for both transport and storage.


MODEL SPECIFICATIONS

Part No.	Barcode	Box	Description	Motor	Battery	Weight	Dimensions	Weight
321BATPRR	8050532013339	1	e-FOX professional tiles/slabs vibrator, battery powered, supplied with a 21x41 cm (8 1/4" x 16 1/8") vibrating plate, battery charger, bag	15V	38.5 Wh	5,8 Kg 12.8 lbs	45x23x h16 cm 17 2/3"x9"xh 6 1/3"	6,2 Kg 13.7 lbs





LUPETTO

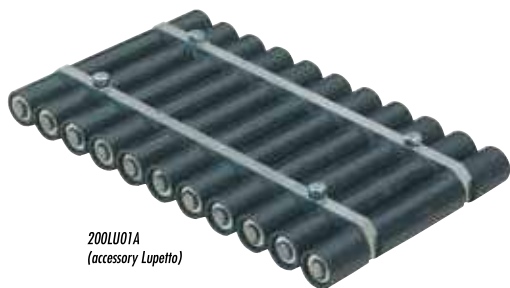

200LU01A
(accessory Lupetto)

TECHNICAL CHARACTERISTICS



150 W



25x45 cm



SPEED
SELECTOR

OPTIONAL



33 ROLLERS

PACKAGE



CARTON BOX

- For laying tiles in mud bed, using the vibration method.
- The high vibration frequency (8200 rounds/min.) enables the perfect levelling of the tile and ensures the full bond of the mud to the tile.
- Ergonomic handle.

- Two vibration speeds: 6000/8200 rounds/min.
- Rectangular interchangeable plastic plate.
- Supplied with: transformer from 230/110 Volt to 42 Vol.

MODEL SPECIFICATIONS

Part No.								
116CC EU	8024648084668	230/42 V 50/60 Hz	Single-phase	90 W	25x45 cm 10"x17 3/4"	-	•	
116CC US	8024648084675	110/42 V 60 Hz				8200	-	•
116CC GB	8024648086709	110/42 V 50 Hz				9800	-	•
				8200		-	•	

DIMENSIONS AND WEIGHT

Part No.							
LUPETTO	1	11,2 Kg	24.6 lbs	60x30xh 25 cm	23 5/8"x11 7/8"xh 10"	11,8 Kg	26 lbs

ACCESSORIES

Part No.			Description						
200LU01A	8024648014467	1	Complete rollers kit (spare part)	13 Kg	28.6 lbs	25x45 cm	10"x17 3/4"	14 Kg	30.8 lbs

